


Clip Strips

Clip Strips have been designed to provide the highest level of shock and vibration isolation between pipe work and hangers. Available in three grades for varying applications, Clip Strips fit most common strap widths, are easy to install and can be supplied to suit temperatures up to +300°C.


Key Features & Benefits:

- A wide range of standard sizes
- Provides an unrivalled level of cushioning and support
- Pliable and easy to cut
- Prevents electrolytic action between dissimilar metals

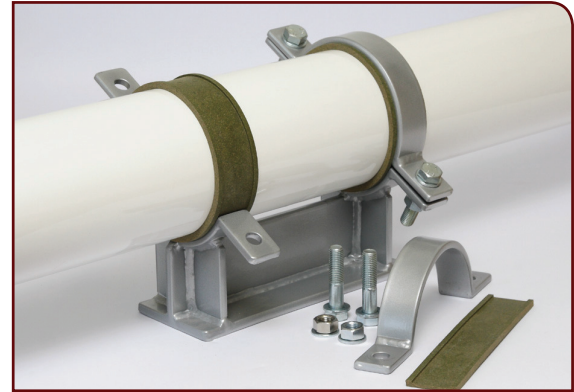

Type S/CL

- Colour: Red
- Operational temperature: -40°C to +100°C




Type HT/CL

- Colour: Green
- Operational temperature: -40°C to +150°C



Type VHT/CL

- Colour: Yellow
- Operational temperature: -50°C to +300°C



JW Ref Number	Base (A) Thickness	Clip Width (B)	Recess Depth (R)	Wall Width (W)
55-50	3mm (0.12")	12.5mm (0.49")	1.5mm (0.06")	3mm (0.12")
55-75	3mm (0.12")	19mm (0.75")	1.5mm (0.06")	3mm (0.12")
55-100	5mm (0.20")	25mm (0.98")	2.5mm (0.10")	6mm (0.24")
55-125	5mm (0.20")	32mm (1.26")	2.5mm (0.10")	6mm (0.24")
55-175	6mm (0.24")	40mm (1.57")	2.5mm (0.10")	6mm (0.24")
55-200	6mm (0.24")	50mm (1.97")	2.5mm (0.10")	6mm (0.24")
55-250	6mm (0.24")	64mm (2.52")	2.5mm (0.10")	6mm (0.24")
55-300	9.5mm (0.37")	75mm (2.95")	5mm (0.20")	12.5mm (0.49")
55-400	9.5mm (0.37")	100mm (3.94")	5mm (0.20")	12.5mm (0.49")
55-500	9.5mm (0.37")	125mm (4.92")	5mm (0.20")	12.5mm (0.49")
55-600	12.5mm (0.49")	150mm (5.91")	6mm (0.24")	19mm (0.75")

Base (A) Thickness	Clip Width (B)	Recess Depth (R)	Wall Width (W)
2mm (0.08")	35mm (1.38")	2mm (0.08")	5mm (0.20")
2mm (0.08")	45mm (1.77")	2mm (0.08")	5mm (0.20")
2mm (0.08")	55mm (2.17")	2mm (0.08")	5mm (0.20")
2mm (0.08")	65mm (2.56")	2mm (0.08")	5mm (0.20")
2mm (0.08")	75mm (2.95")	2mm (0.08")	5mm (0.20")
2mm (0.08")	85mm (3.35")	2mm (0.08")	5mm (0.20")
2mm (0.08")	95mm (3.74")	2mm (0.08")	5mm (0.20")
2mm (0.08")	105mm (4.13")	2mm (0.08")	5mm (0.20")
2mm (0.08")	115mm (4.53")	2mm (0.08")	5mm (0.20")