

NDMINAL 1	RON PIPE SIZE	PAD <sup>*</sup>	THK.	STANDARD	
inches	millimeters	ir	mm	ANGLE "A"	
UP to 4"	UP to 102	1/4"	6	90°	
6" to 10"	152 to 254	1/4"	6	60°	
12" to 20"	305 to 508	1/4"	6	30°	
24" to 48"	610 to 1220	3/8"	10	30°	

The above are APP's Standard Angles of Pipe Coverage. Other Sizes Available on Request.



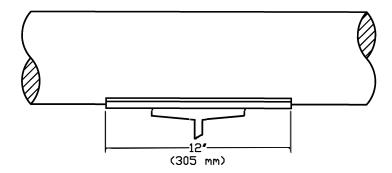


## **HOW TO ORDER:**


## Description:

Wear Pad 6" X 1/4 " X 60° X 12"

- 6" Iron Pipe Size
- 1/4" Wear Pad Thickness (available in varied thicknesses)
- 60° Pipe Coverage (Angle "A")
- 12" Wear Pad Length



## Part Number:



## **NOTES & SPECIFICATIONS:**

- 1. Uninsulated Wear Pad shall be made of custom formulated Vinyl Ester or Epoxy Resin as manufactured by Advanced Piping Products.
- 2 To install APP Wear Pads follow APP Installation Instructions
- 3 Stock Sizes: 1/2" (13mm) to 36" (914mm) with Standard Angles of Coverage.
- 4 Other Lengths, Degrees of Coverage, & Thickness are available upon request.
- 5 Operating Temp Limit: -320° F (-195° C) to +400° F (+204° C).

	ITEM	QTY		DESCRIPTION				MATERIAL			
	1	1	Wear Pad					Vinyl Ester Resin			
CUSTOMER	-		DWN.	DATE 03	/12/15	ADVANCED PIPING PRODUCTS 5611 Guhn Road Suite A1 Houston, TX 77040 Tel. 713-956-2922 Fax 713-956-4090					
DATE			снк.								
CD NAME:			ENG.								
CONTACT			MFG.			www.appmfg.com					
TEL. NO.	APPR.				DWG DESCRIPTION						
E-MAIL:						1	APP 12" (30)	5mm) Lono	Wear Pa	d	
RFQ					1	ł	111 12 (00)	ormiz Long	wear ra	<b>-</b>	
PDi						SIZE A		WP120315		REV. O	
REF						Н		MLIE0312		U	
			NEXT	ASSY	QTY	SCALE	None		SHEET 1	OF 1	